

July, 2019



Paint Booth Mat™


anchored by New Pig Grippy® Technology New Pig



Fast installation in less than 30 minutes



Vacuum daily¹ to remove contaminants

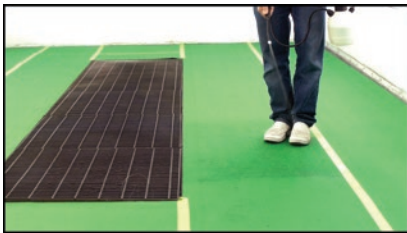

Mist daily with Like90 Particle Control



Typical amount of dirt removed daily

Cuts paint defects by 50% or more!

- **Keeps paintwork clean**
 - Durable non-woven material traps dust and overspray on the floor
 - Vacuum daily to remove dust and overspray from booth¹
 - Mist daily with Like90 Particle Control for best results
 - Reduces paint contamination by 50% or more
- **Improves booth environment**
 - Green color makes booth pleasant and bright
 - Maintains good lighting and reduces noise in the booth
 - Protects booth floor – no more scraping off overspray buildup
- **Durable, padded mat with solvent-resistant backing**
 - Typically lasts 3 to 4 months, even in high-volume booths
 - Padding makes standing and kneeling more comfortable, reducing painter fatigue
 - Adhesive backing holds tight to prevent wrinkling or bunching²
- **Fast and easy to install**
 - Two people can install Paint Booth Mat in less than 30 minutes
 - Minimal floor prep and no special application tools required
 - Tape seams with standard 2-inch masking tape
 - One roll covers most automotive paint booth floors
- **Compliant with NFPA 33 for spray booth safety**
 - Surface Resistance and Static Decay tests @ 50% R.H.
 - Due to a wide variety of conditions, daily use of Like90 Particle Control is recommended

Product Details

- Part number: 10050
- Size: 32 inches by 150 feet (400 sq. feet)
- Color: Green
- Durability: Replacement recommended every 3 to 4 months
- Shipping info: 14 x 14 x 33 inches; 44 lbs.

¹Warning! Do not install or remove the mat, or vacuum the mat or bare floor when explosive concentrations of flammable materials are present, as static discharge may occur during these activities. Always ventilate spray booth completely to remove any ignitable vapors and dust prior to these activities.

²Adhesion may vary based on existing floor conditions. Any adhesive mat has the potential to leave residue or lift sections of painted surfaces and loose or damaged tiles. On very smooth surfaces (e.g. tile, paint, epoxy), the mat may adhere too well. If the floor is dirty or covered with uneven overspray, the mat will not adhere as well. Pay special attention to cleaning the corners and edges of the floor where dust and overspray can accumulate and compromise adhesion. Check adhesion periodically to ensure results meet your expectations and replace every 3 to 4 months. Not intended for home use or wooden floors.



Call 1-888-9-Like90 to order!

Like90 Paint Booth Mat™

P/N 10050



Like90 Particle Control™

1-gallon: P/N 10008

5-gallon: P/N 10009

Patent no. 10059847

